


DURACELL®

CR2430

Lithium/Manganese Dioxide Battery


Li/MnO₂

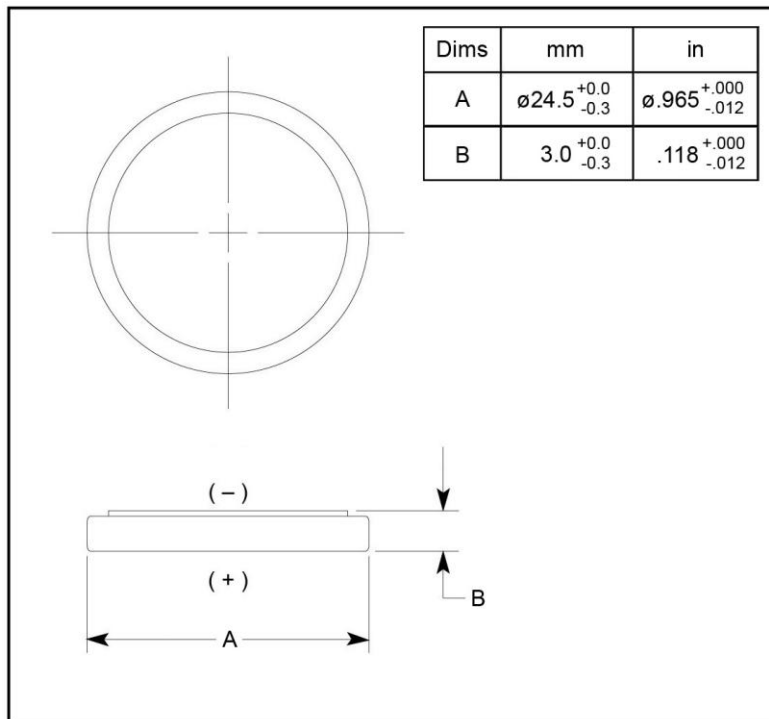


SPECIFICATIONS

Nominal Voltage:	3.0 V
Typical Voltage:	3.1 – 3.3 V
Rated Capacity:	270 mAh on 15 k Ω to 2.0 V
Average Weight:	4.5 g (0.159 oz.)
Terminals:	Flat
Operating Temp. Range:	-20°C to 60°C (-4°F to 140°F)
NEDA/ANSI:	5011LC
IEC:	CR2430

Discharge Characteristics

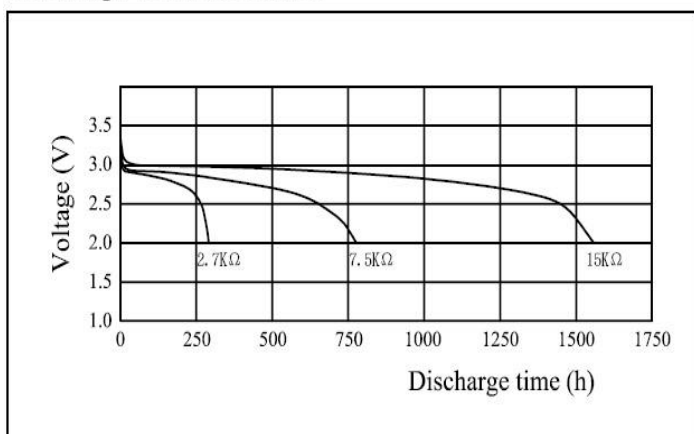

Temperature Characteristics

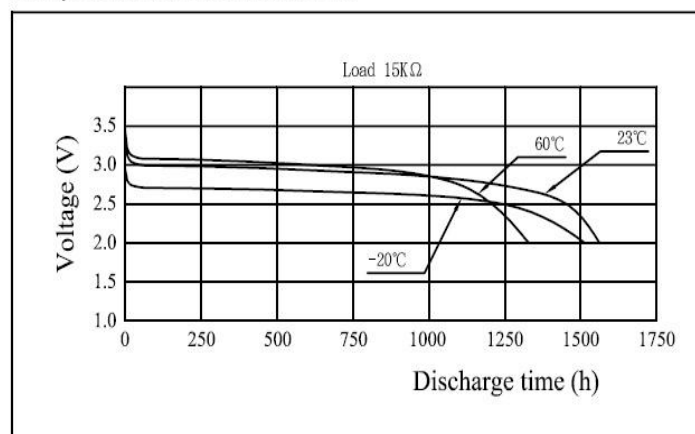

DURACELL®

BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


DURACELL®

CR2430


Lithium/Manganese Dioxide Battery

Li/MnO₂


Load vs. Operating Voltage

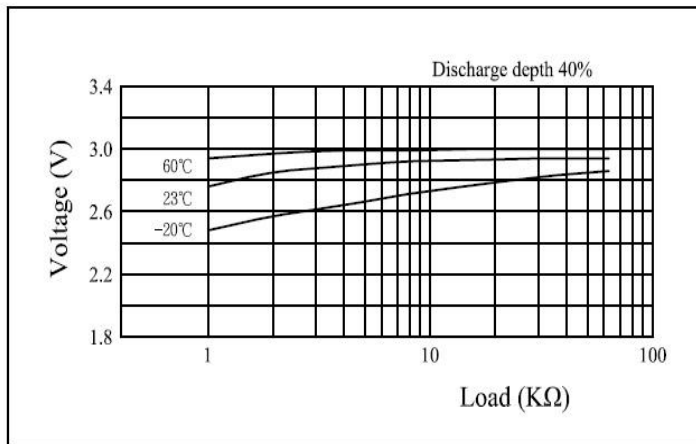


Load vs. Capacity

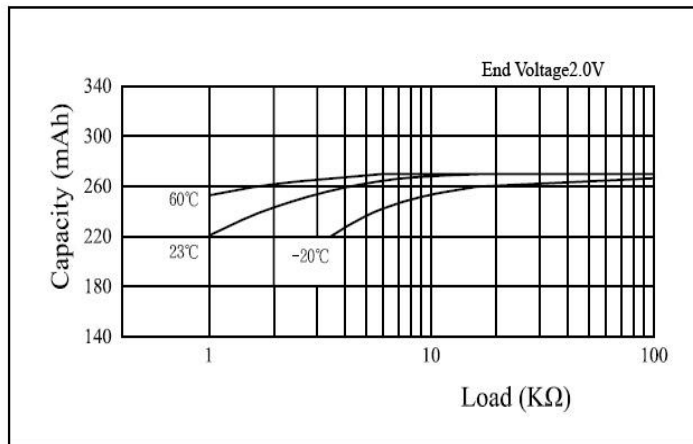

Pulse Discharge Characteristics

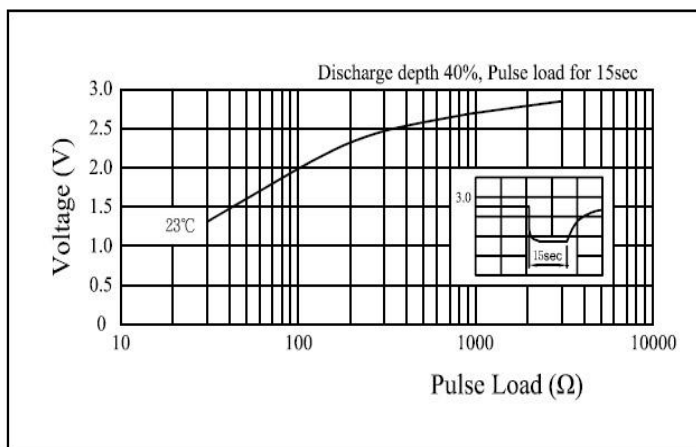

Storage Characteristics

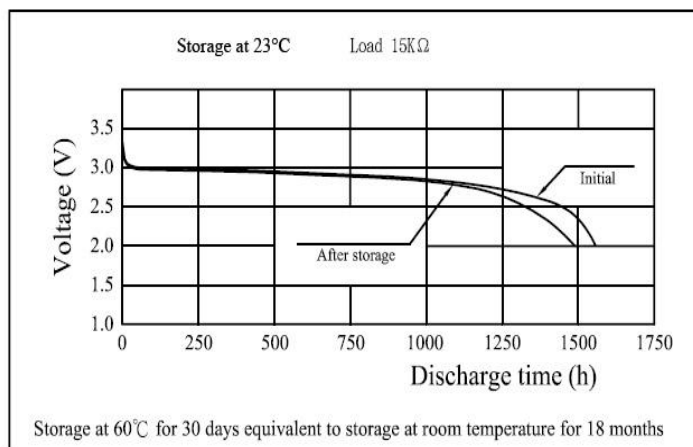

DURACELL®

BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.